

MEGAMAT 950


VIBRATION CONTROL



VIBRATION INSULATION PANEL MADE OF END-OF-LIFE TYRES RUBBER GRANULES AND FIBRES

■ TECHNICAL SPECIFICATION

Anti-vibration material supplied in panels, thickness 12,5/25 mm, made of rubber granules and fibres from End-of-Life Tyres (ELTs) compacted using a polyurethane binder in a hot process. A non-woven, non-stretch synthetic membrane is applied on one side of panel, for added protection; density 950 kg/m³. Panels dimensions are m 1,20 length, m 0,80 width. To be used for static and dynamic loads up to 2 N/mm².

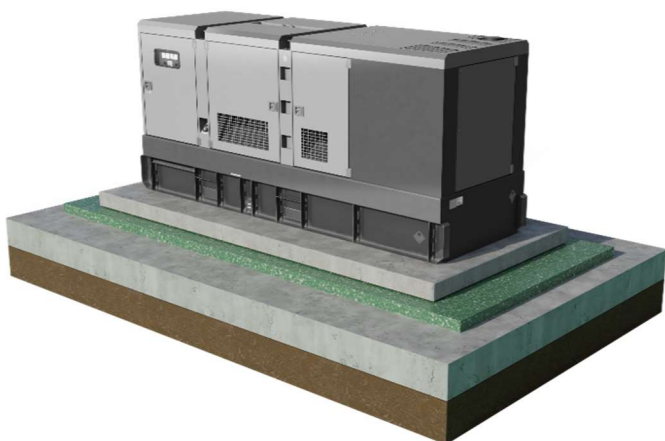

■ APPLICATION AREA

Application fields	Load	Deformation
Static	up to 0,50 N/mm ²	~ 10%
Static and Dynamic	up to 2,00 N/mm ²	~ 30%
Load peaks (short time)	up to 4,00 N/mm ²	~ 50%

■ TECHNICAL DATA

		Tolerance	Standard
Thickness	12,5 - 25 mm	± 2	
Length	1,20 m	± 2%	
Width	0,80 m	± 2%	
Density	950 kg/m ³	± 10%	
Stress at strain 10%	0,50 N/mm ²	± 10%	UNI EN ISO 29470
Static Modulus of Elasticity (Es) - strain 10%	5,00 N/mm ²	± 10%	UNI EN ISO 29470
Dynamic Modulus of Elasticity (Ed) - strain 10%	14,2 N/mm ²	± 10%	
Loss factor (η)	0,137	± 10%	
Thermal conductivity coefficient (λ)	0,120		UNI EN 12668
Inflammability	E		UNI EN 13501-2




MEGAMAT 950


VIBRATION CONTROL




LOAD DEFLECTION CURVE

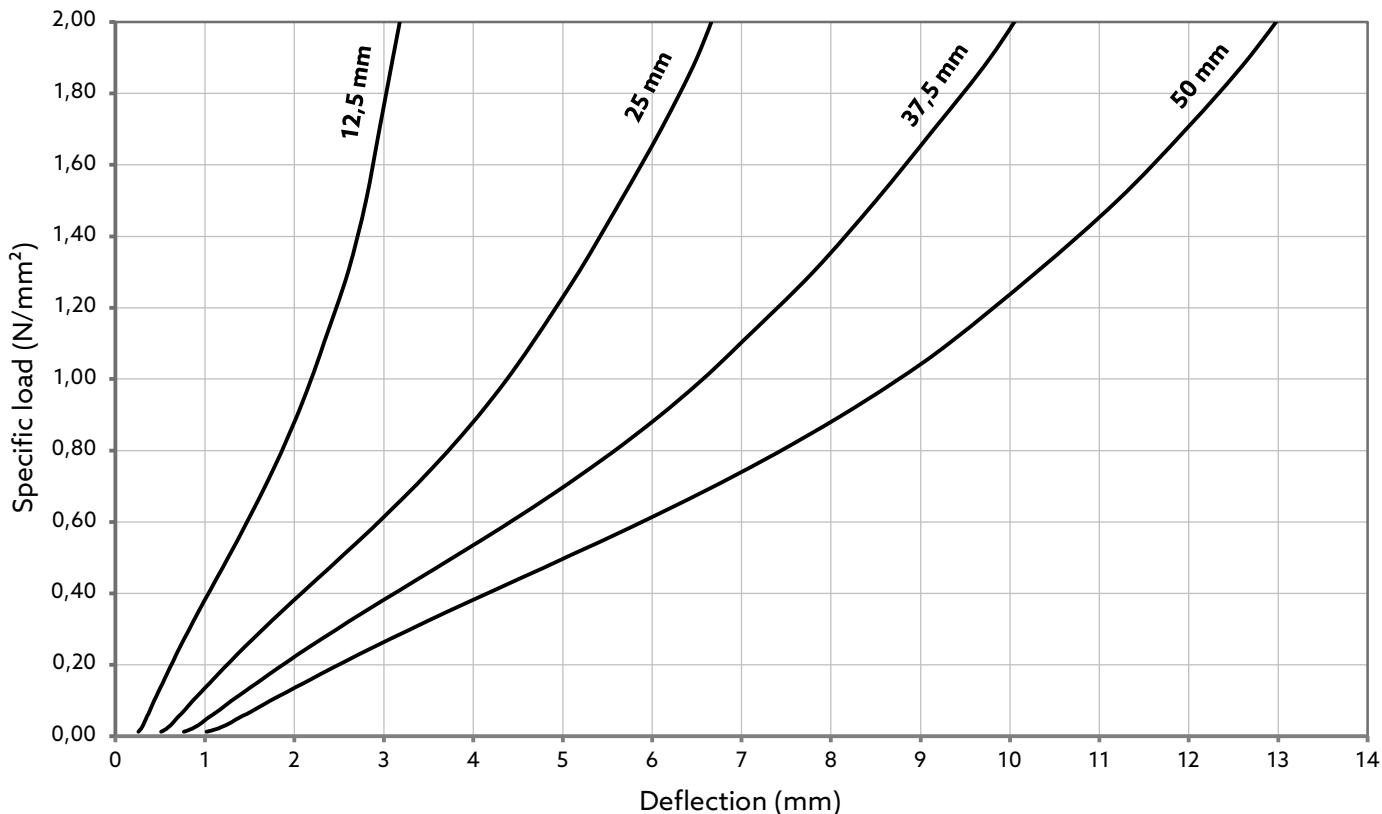

STATIC MODULUS OF ELASTICITY

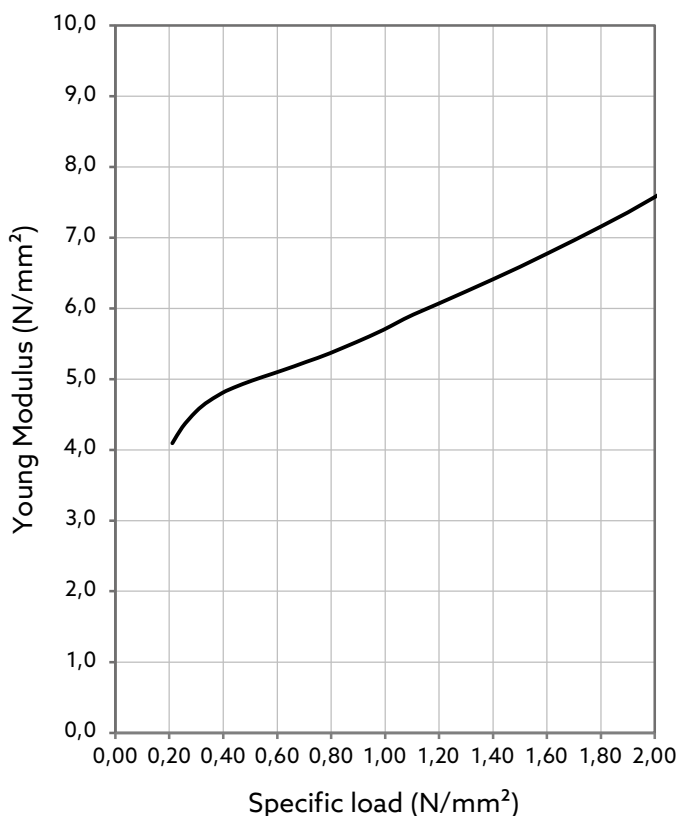

DYNAMIC MODULUS OF ELASTICITY

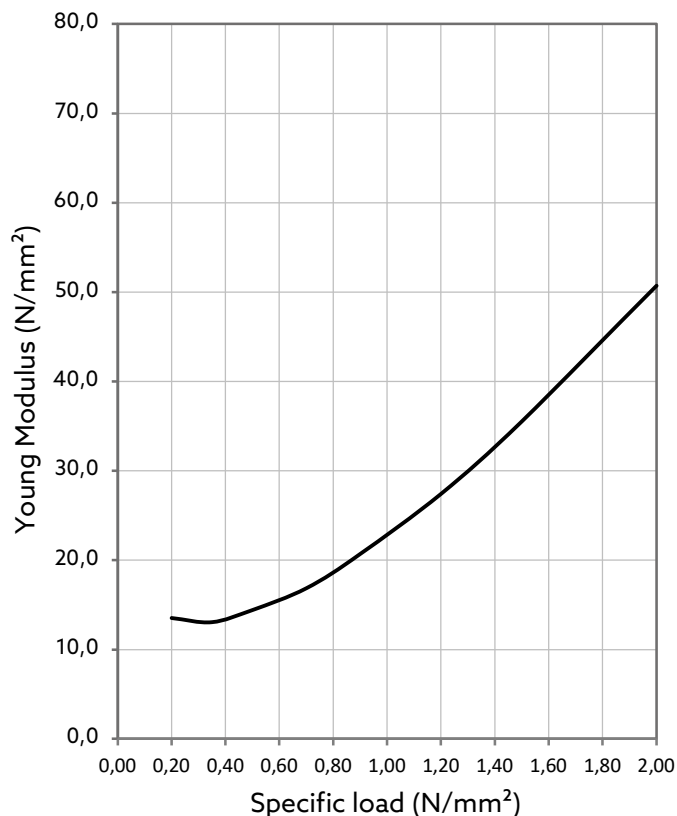


MEGAMAT 950

VIBRATION CONTROL



NATURAL FREQUENCY

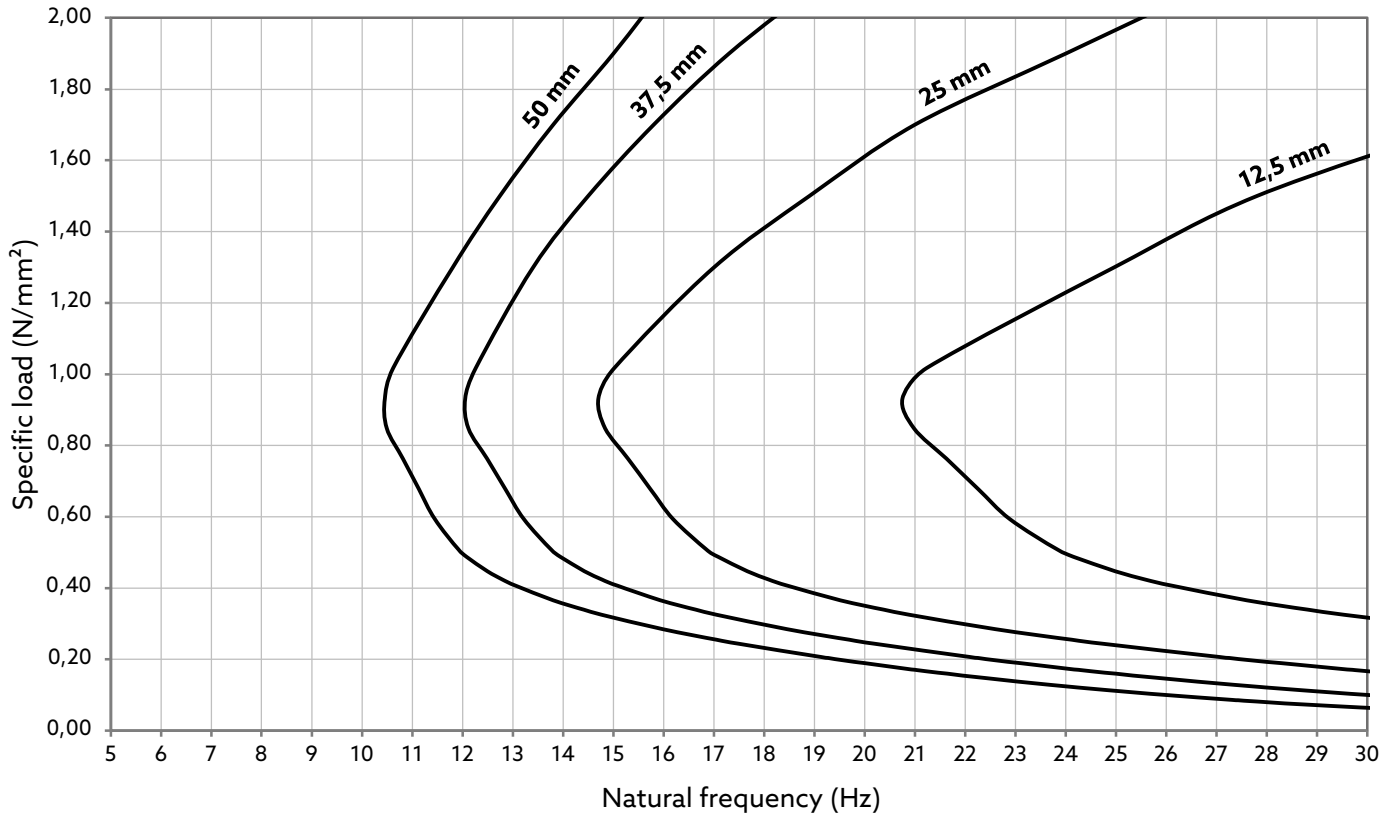

VIBRATION ISOLATION EFFICIENCY

