

MEGAMAT PAD

VIBRATION CONTROL




SUPPORT FOR VIBRATION INSULATION MADE IN PAD IN RUBBER FROM RECYCLING OF PFU

■ TECHNICAL SPECIFICATION

Anti-vibration bearing in the thickness of 20 mm or 50 mm, made of rubber granules and fibres from End-of-Life Tyres (ELTs) compacted using a polyurethane binder in a hot process. A non-woven, non-stretch waperproof synthetic membrane is applied on one side of the bearings, for added protection; density 500 kg/m³.

The pads dimensions are mm 240 lenght, mm 240 width. To be used for static and dynamic loads up to 0,25 N/mm².

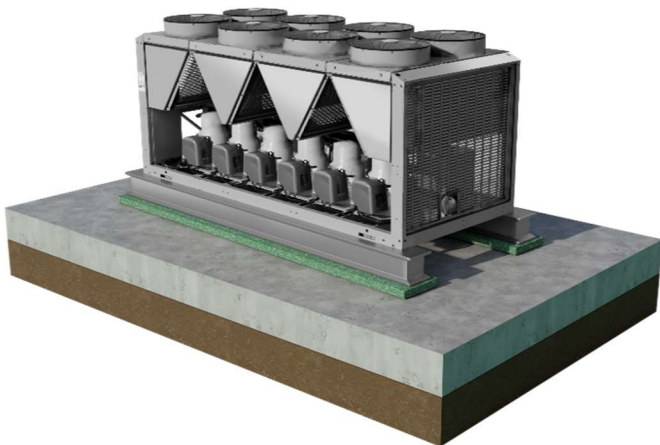

■ APPLICATION AREA

Application fields	Load	Deformation
Static	up to 0,05 N/mm ²	~ 10%
Static and Dynamic	up to 0,25 N/mm ²	~ 30%
Load peaks (short time)	up to 0,80 N/mm ²	~ 50%

■ TECHNICAL DATA

		Tolerance	Standard
Thickness	20 - 50 mm	± 2	
Lenght	240 mm	± 2%	
Width	240 mm	± 2%	
Density	500 kg/m ³	± 10%	
Stress at strain 10%	0,05 N/mm ²	± 10%	UNI EN ISO 29470
Static Modulus of Elasticity (Es) - strain 10%	0,55 N/mm ²	± 10%	UNI EN ISO 29470
Dynamic Modulus of Elasticity (Ed) - strain 10%	1,80 N/mm ²	± 10%	
Loss factor (η)	0,143	± 10%	
Thermal conductivity coefficient (λ)	0,120		UNI EN 12668
Inflammability	E		UNI EN 13501-2




MEGAMAT PAD


VIBRATION CONTROL




LOAD DEFLECTION CURVE

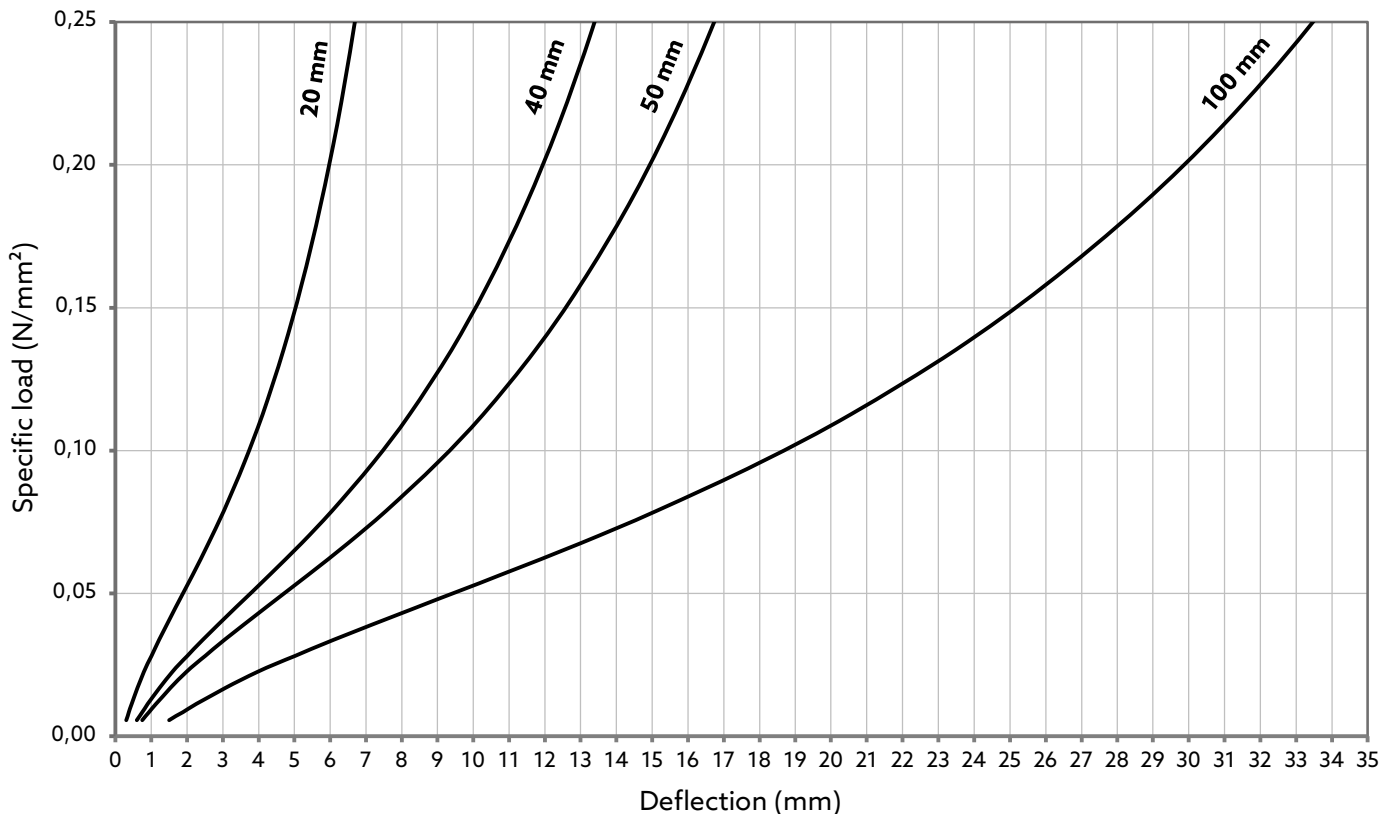

STATIC MODULUS OF ELASTICITY

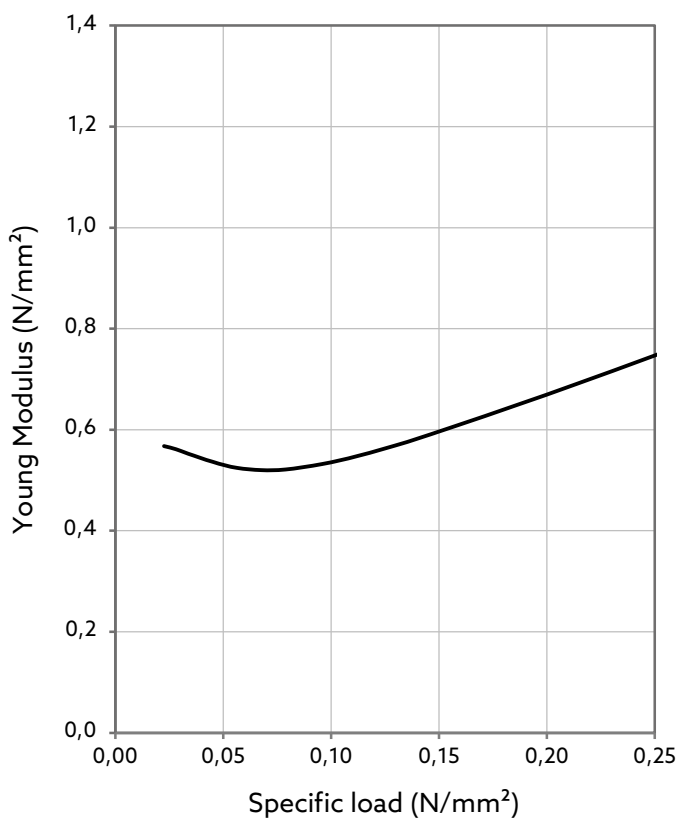

DYNAMIC MODULUS OF ELASTICITY

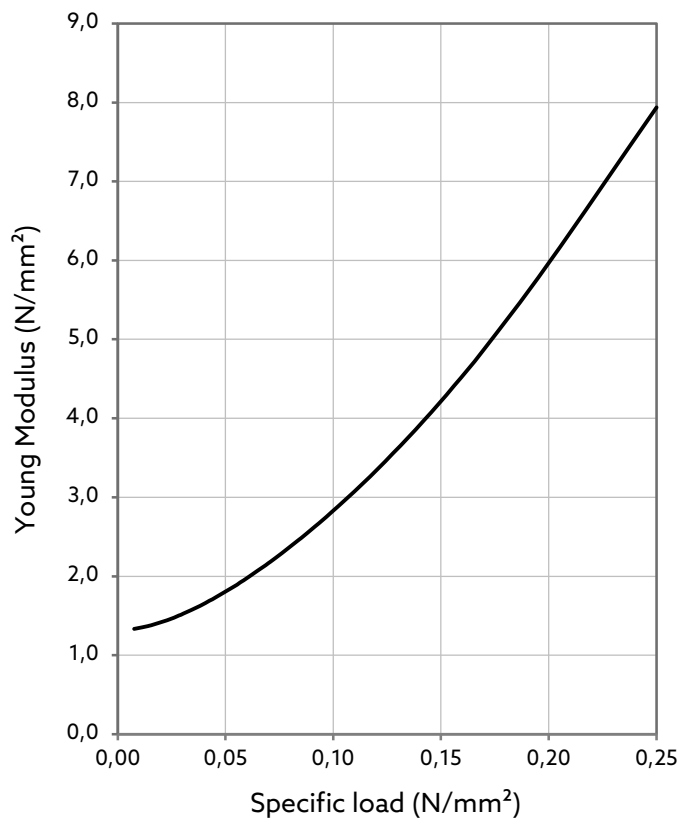


MEGAMAT PAD

VIBRATION CONTROL



NATURAL FREQUENCY

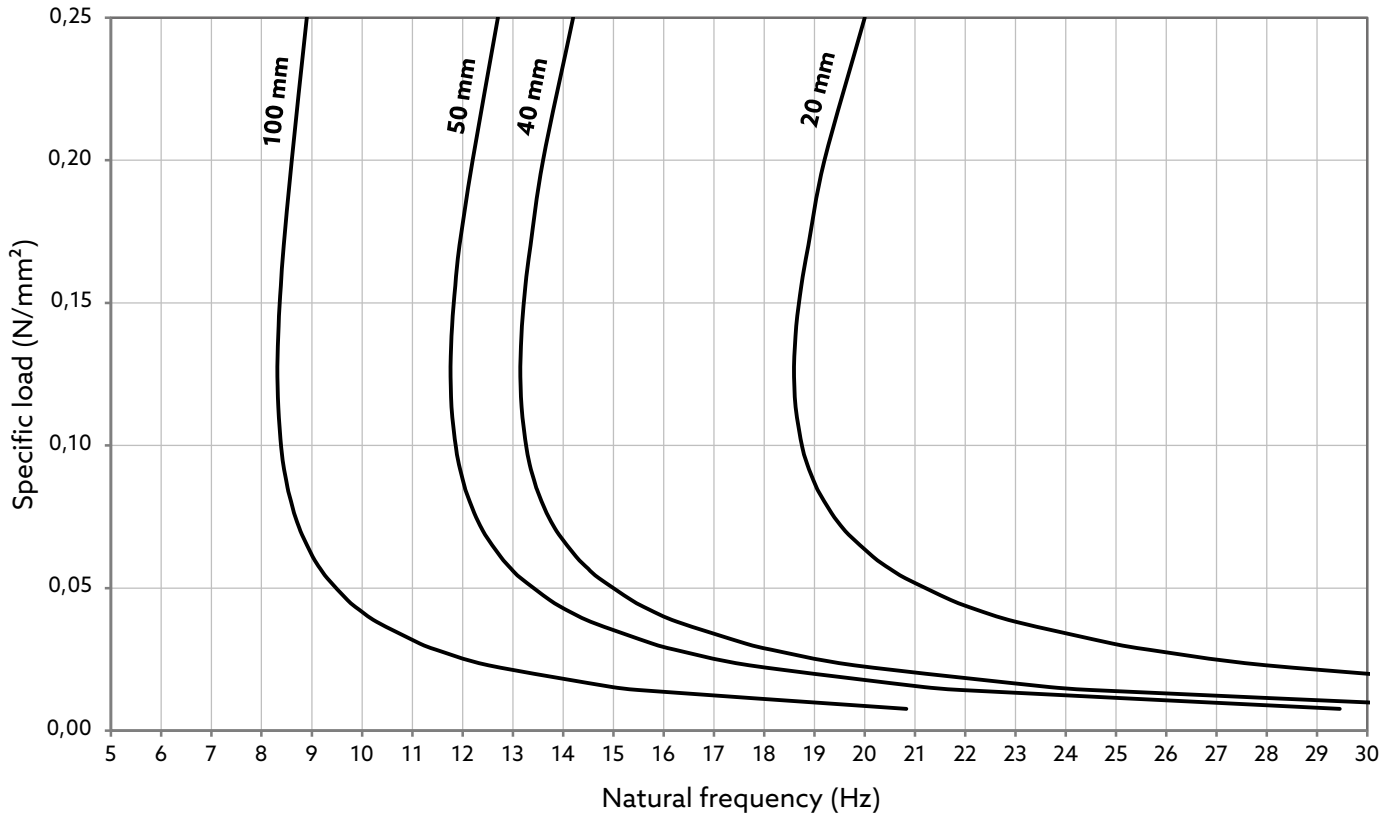

VIBRATION ISOLATION EFFICIENCY

